



Rembrandt 1,2/2,5 kW

The NEW technology in discharge Daylight Fixtures

Patent Pending



NEW REMBRANDT 1,2-2,5 KW DAYLIGHT FRESNEL

CONSTRUCTION:

- Fixture housing in STAINLESS STEEL (INOX).

FINISHING:

- SAND BLASTED AND CHEMICALLY TREATED MATT STAINLESS STEEL (INOX).

PROTECTION FACTOR:

- IP 23, allowing the use of the fixture during moderate rain.

DISCHARGE LAMP TYPES:

- Single ended Hot Re-strike either 1,2 kW or 2,5 kW discharge lamps

DOUBLE POWER

- QUICK ACTION TOOL FREE lamp holder mechanism to set the fixture for either 1,2 or 2,5 kW lamp use.


INNOVATIVE PATENT PENDING IGNITER SYSTEM:

- TWO STAGE IGNITER, eliminating the need of HIGH VOLTAGE isolated movable internal cable.
- SILENT operation of the IGNITER also in FLICKER FREE mode.

WEIGHT:

- 14,3 Kg.

MOD. 2522

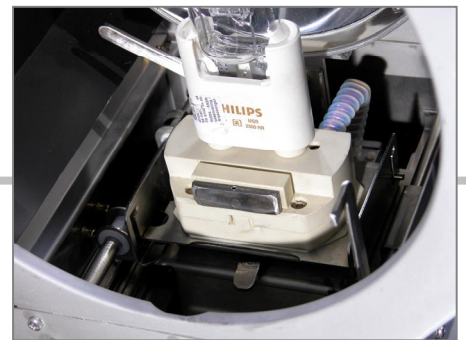

ACCESSORIES & OPTIONALS

